

China

CCC

DONGFENG

HLW5180ZWX6EQ

USD15000~25000/unit

ship, train or long vehicle

depends on order quantity

7700×2500×3100,3050mm

1000units/month

naked, with wax; shipped by container, ro-ro

T/T, L/C, Western Union, MoneyGram

# Light Duty Dump Garbage Disposal Truck 2-3 Ton For Recycling Trash

# **Basic Information**

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity: 1units
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:



## **Product Specification**

- Overall Size:
- Driving Form:
- Total Weight:
- Curb Weight:
- Rated Loading:
- Wheel Base:
- F/R Tread:
- T/IT Houd.
- Maximum Speed:
- Fuel Type:
- Engine Type:
- Max. Power:
- Max Torque:
- Displacement:
- Emission Level:
- Cab:
- Diesel Engine B6.2NS6B210 154kw/210hp 850N.m 6200ml Eur.V

4\*2

18000kg

8700kg

3600mm

105km/h

9170/9105kg

1862mm/1806mm





for more products please visit us on battery-generator.com

### **Product Description**

# Light Duty Chassis Dump Garbage Truck, Garbage Collection Dumper Truck with 2-3Ton capacity

#### Garbage Product Detailed Specification:


Vehicle pa	rameters	•		
Vehicle Model		HLW5180ZWX6EQ	Vehicle Type	Gabage Dump Truck
Overall dimensions(mm)		7700×2500×3100,305 0	Curb weight	8700kg
Total Veight		18000kg	Rated Capacity	9170/9105kg
F/R overhang		1055/1000mm	Gabage Box Size 5200×2100×1450mm	
Chassis p	arameters			·
Chassis model		EQ1185LJ9CDE	Chassis brand	DFAC
Front Wheel Track		1862mm	Wheel base	3600mm
Rear wheel track		1806mm	Axle Number	2 axles
Approach/departure angle		19°/13°	Maximum speed	105km/h
Cab	Configuration	A row and a half cab,3 passengers allowed, air conditioner.		
	Color	White, or as request		
Engine	Model	B6.2NS6B210		
	Emission	Euro V		
	Туре	Diesel Type, 6cylinders in-line		
	Rated power	154kw/210hp, rated power speed 2300rpm		
	Displacement	6200ml		
	Max.torque	850N.m		
Tire	Size	295/80R22.5 18PR,10.00R20 18PR,275/80R22.5 18PR		
	Number	6pcs		

#### Garbage Truck HLW5180ZWX6EQ Description:

This garbage turck is mainly used for sludge transportation, and the unloading mode is post unloading; The side and rear protective devices are made of Q235, the side protection is connected by bolts, and the rear protection is connected by welding. The section size of the rear protection (mm):  $130 \times 90$ . Ground clearance of rear protection (mm): 450; Optional etc on-board device; A traveling data recorder with satellite positioning function is installed.

#### Products HD pictures:



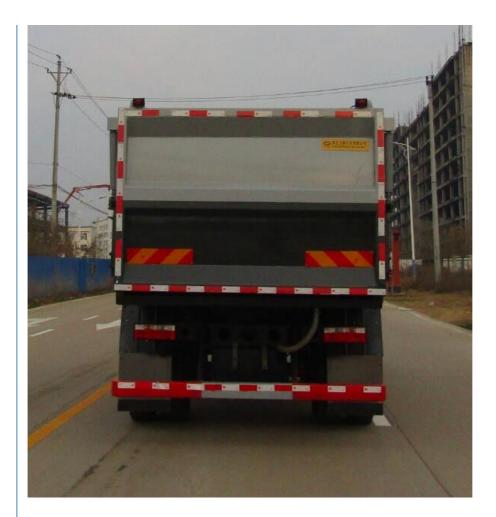

#### Packing and Shipping:

#### FQA:

Q:How about the delivery time?

- A: Most of our trucks are made to new order, so the delivery time is usually 20~45days.
- Q:How about shipping ?

A: Big size trucks always shipping by RORO or Bulk ship or flat bed container or open top container, small type can shipping by container ,

- Pls contact us to get a shipping quotation.
- Q: How many trucks does your factory produce per years?

A: Almost 3000 units one month.

Q: How about your product After-sales service system?

A: Our main export country have accepted after-sales service, some of country used the third department service.

Q: Do you accept Custom orders? What's is your MOQ order?

A: Yes, we do, our MOQ is depends on exact model, mostly is 1unit.

Q:Which country do you have exported to?

A: our special trucks can be found in many parts of the world, such as Russia, Ukraine, Uzbekistan, Jordan, Chile, Brazil, Thailand, Malaysia, Lebanon etc, and gain good reputation from local market.

